




## 10.000 - 25.000 l/h Discs, cartridges, bag

**Typical applications**  
Plating and process industry


- Features**
- Compact and robust, service friendly
  - Filter chamber with welded bottom (no seal)
  - Discs (thin/thick paper, cloth), cartridges (max. Ø 69mm) or pleated bag
  - All PP construction
  - Top plate made of glass-filled PP
  - Max. temperature PP 80°C
  - External fasteners in SS316
  - Unions for rigid piping (PP or CPVC sockets)

- Options**
- Hose connection
  - Contact manometer
  - Single open end cartridges
  - Customised mounting plate
  - Four PP legs (standard 300mm)
  - External fasteners in titanium or electroless nickel coated

F-151A-P-PP



## Filter chambers F151/152 PP

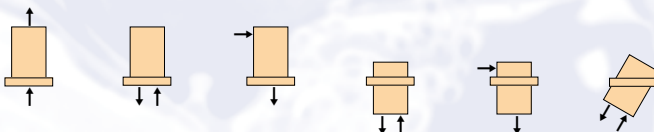

F			FIT (in tank)			Medium	Material	In	Out
151/152	151A/152A	151Z/152Z	151A/152A	151Z/152Z	151L/152L	K/P/D/PC	PP	d50/DN40	

Selection: FIT - 151A - K - PP

K = cartridges

Qty x L
151-K = 15 x 10"
152-K = 15 x 20"

P = discs

Qty	OD/ID	m <sup>2</sup>
151-P = 37(32) x 280/50	2,2(1,9)	
152-P = 69(65) x 280/50	4,1(3,9)	

D = pleated bag<sup>\*)</sup>

L	m <sup>2</sup>
151-D = 10"	1,3
152-D = 20"	2,4

PC = discs + carbon bag

151-PC = 10 discs + carbon bag (15L)
152-PC = 37 discs + carbon bag (30L)

[www.hendor.com](http://www.hendor.com)

standard maximum pressure				
°C	°F	Mpa	bar	psi
20	68	0,35	3,5	50
55	131	0,35	3,5	50
80	176	0,25	2,5	36

option high pressure model				
°C	°F	Mpa	bar	psi
20	68	0,55	5,5	80
50	122	0,55	5,5	80
80	176	0,25	2,5	36

<sup>\*)</sup> For filter chambers with GAF-type filter bags, see separate leaflet