



F-31A-K-PP

## 3.000 - 4.000 l/h Discs, cartridges, bag


**Typical applications**  
Plating and process industry

**Features**


- Compact and robust, service friendly
- Filter chamber with welded bottom (no seal)
- Discs (thin/thick paper, cloth), cartridges (max. Ø 70mm) or pleated bag
- All PP construction
- Top plate made of glass-filled PP
- Max. temperature PP 80°C
- External fasteners in SS316
- Unions for rigid piping (PP or CPVC sockets)

**Options**

- Hose connection
- (Contact) manometer
- Single open end cartridges
- Customised mounting plate
- Four PP legs (standard 300mm)
- External fasteners in titanium or electroless nickel coated



## Filter chambers F31/32 PP

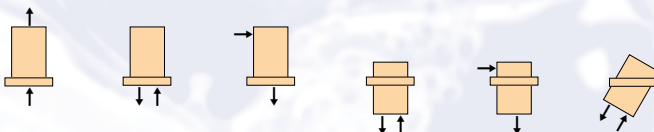

F			FIT (in tank)			Medium	Material	In	Out
31/32	31A/32A	31Z/32Z	31A/32A	31Z/32Z	31L/32L	K/P/D/PC	PP	d25/DN20	

Selection: F - 31A - K - PP

[www.hendor.com](http://www.hendor.com)

standard maximum pressure				
°C	°F	Mpa	bar	psi
20	68	0,35	3,5	50
55	131	0,35	3,5	50
80	176	0,25	2,5	36

K = cartridges

Qty x L
31-K = 3 x 10"
32-K = 3 x 20"

P = discs

Qty	OD/ID	m <sup>2</sup>
31-P = 37(32)	x 136/32	0,5(0,4)
32-P = 69(65)	x 136/32	1,0(0,9)

D = pleated bag<sup>\*)</sup>

L	m <sup>2</sup>
31-D = 10"	0,4
32-D = 20"	0,7

PC = discs + carbon bag

31-PC = 10 discs + carbon bag (4L)
32-PC = 37 discs + carbon bag (7,5L)

<sup>\*)</sup> For filter chambers with GAF-type filter bags, see separate leaflet