

## Control unit pe200-D

### For manual current and voltage setting of the DC power supplies type POWER STATION

pe3000 (Built-in units)

pe1020/1050/2050 (Desktop units)


pe3010/3020/3030 (Wall mount units)

pe5000 (Cabinet installation for high output current)

Control unit with digital displays for current and voltage and remote contact ON / OFF. Designed for use in plating environment.



Control unit pe200-D standard, front view

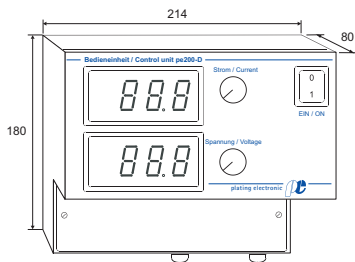

Control unit pe200-D standard, dimensions

### Characteristic values

Digital meters for current and voltage

Current and voltage infinitely adjustable via ten-turn potentiometers

Potential free contact to switch DC power supply "ON / OFF"

Large LED-display for easy reading

Ambient temperature 40°C

Protection grade: IP54

Data cable: length 5m

Plastic casing, aluminium front panel

Weight: approx. 1000g

Dimensions (W x H x D): 214 x 80 x 180mm

Supply: 230V AC

### Optional available

Current preset

Lockable Plexiglas- cover

LED indication „DC power supply ON“

Supply interruption of the DC power supply via main switch of the control unit

Switching: MAN / AUTO

EMV: EN50011 class A, group B ; EN61000-6-4 and EN61000-6-2;  
CE-conformity low voltage guide line: EN50178

Display resolution:						
Current	9.99	19.9	19.99	199.9	1 999	9 990
Voltage	9.99	19.9	19.99	199.9	-	-

Technical equipment, design and features: subject to change! For further information please contact plating electronic GmbH.